


ITEM	DESCRIPTION	WEIGHT
F5	RUST RED FLOW/COAT	-
F4	GLASS OWENNS CORNINGS 360 RR	-
F3	CATALYST	-
F2	AROPOL 7241PS/PW	-
F1	STAND OFF MATERIAL	-

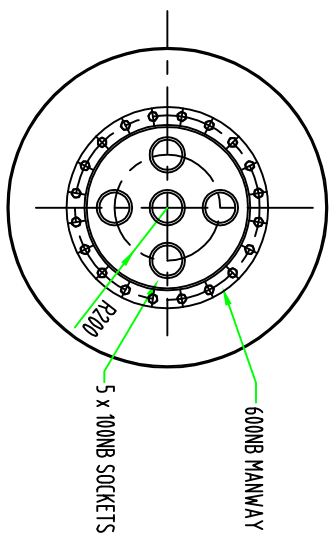

PLAN VIEW ON MANWAY

- NOTE:
- VACUUM ON INTERSTITIAL SPACE IS FACTORY SET & GAUGE SET
 - INSTALLATION AS PER GLASTEEL II INSTALLATION INSTRUCTIONS & APPLICABLE CODES
 - VESSEL IDENTIFICATION No. & MANUFACTURE DATE ARE LAMINATED TO TOP OF VESSEL
 - VESSEL MANUFACTURED TO AS1692
 - PLASTIC LIFTING LUG COVERS SUPPLIED WITH VESSEL
 - HOLD DOWN STRAPS POSITION ARE TO BE MARKED ON VESSEL DURING MANUFACTURING
 - ALL SOCKETS TO BE CLEANED AND FITTED WITH PLASTIC DUST CAPS
 - 6mm STRIKER PLATES TO BE FITTED UNDER ALL OPENINGS
 - ALL WELDS AS PER AS1554.1-GP (IND.T. - VISUAL)
 - VOLUME = 45,860 L (APPROX)
 - WEIGHT OF TANK = 4,280 kg (APPROX)

FREEDOM HATTONVALE

No.	REVISION DETAILS	BY	DATE	CLIENT:
F				TANK SOLUTIONS
E				DRAWN: N.D
D				CHECKED: DATE: 10-05-05
C				APPROVED: DATE:
B				ORDER No: No OFF: ONE (1)
A	ORIGINAL ISSUE			SCALE: N.T.S. CAD REF: JW-GST-SC-P

ITEM	QTY	DESCRIPTION	PART / SUB ASSM No.
S1	4	HOLD DOWN STRAPS	015001
	1	VACUUM MONITOR GAUGE	006131, 017111, 017160
	2	LIFTING LUG COVERS	015071
	2	DIPSTICK T45	SUB1070
		ACCESSORIES	PART / SUB ASSM No.
10	1	STRIKER PLATE	SUB1047
9	2	LIFTING LUG - 5 TONNE C/W DOUBLER PAD	SUB1076
8	3	END Ø2190 ID x 6 PLATE	SUB1004
7	4	SHELL Ø2190 ID x 6 PLATE x 3000 LONG	SUB1036
6	-	-	-
5	2	FRP COLLAR	SUB1028
4	2	600NB MANWAY C/W 5 x 100NB SOCKETS	SUB1095
3	2	100NB FILL SOCKET C/W PIPE	SUB1056
2	2	80NB DIP SOCKET C/W PIPE	SUB1051
1	1	100NB VENT SOCKET	-

TITLE: GENERAL ARRANGEMENT T45 SPLIT (35/10)
GLASTEEL II U/G STORAGE VESSEL

ESTIMATE NUMBER: N/A

DRAWING NUMBER: JG 045000-005

JOB No: SHEET: 1 of 1 REVISION: A

PO BOX 102
CARINGTON N.S.W. 2294
PHONE (02) 4961-2745
FAX (02) 4962-2812

THIS DRAWING & THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF FIBRE-TANK SYSTEMS AND IS STRICTLY CONFIDENTIAL & MUST NOT BE USED OR DISCLOSED WITHOUT WRITTEN CONSENT OF FIBRE-TANK SYSTEMS Pty LIMITED

Dimension in millimetres to the applicable design code of manufacture, and/or client requirement.