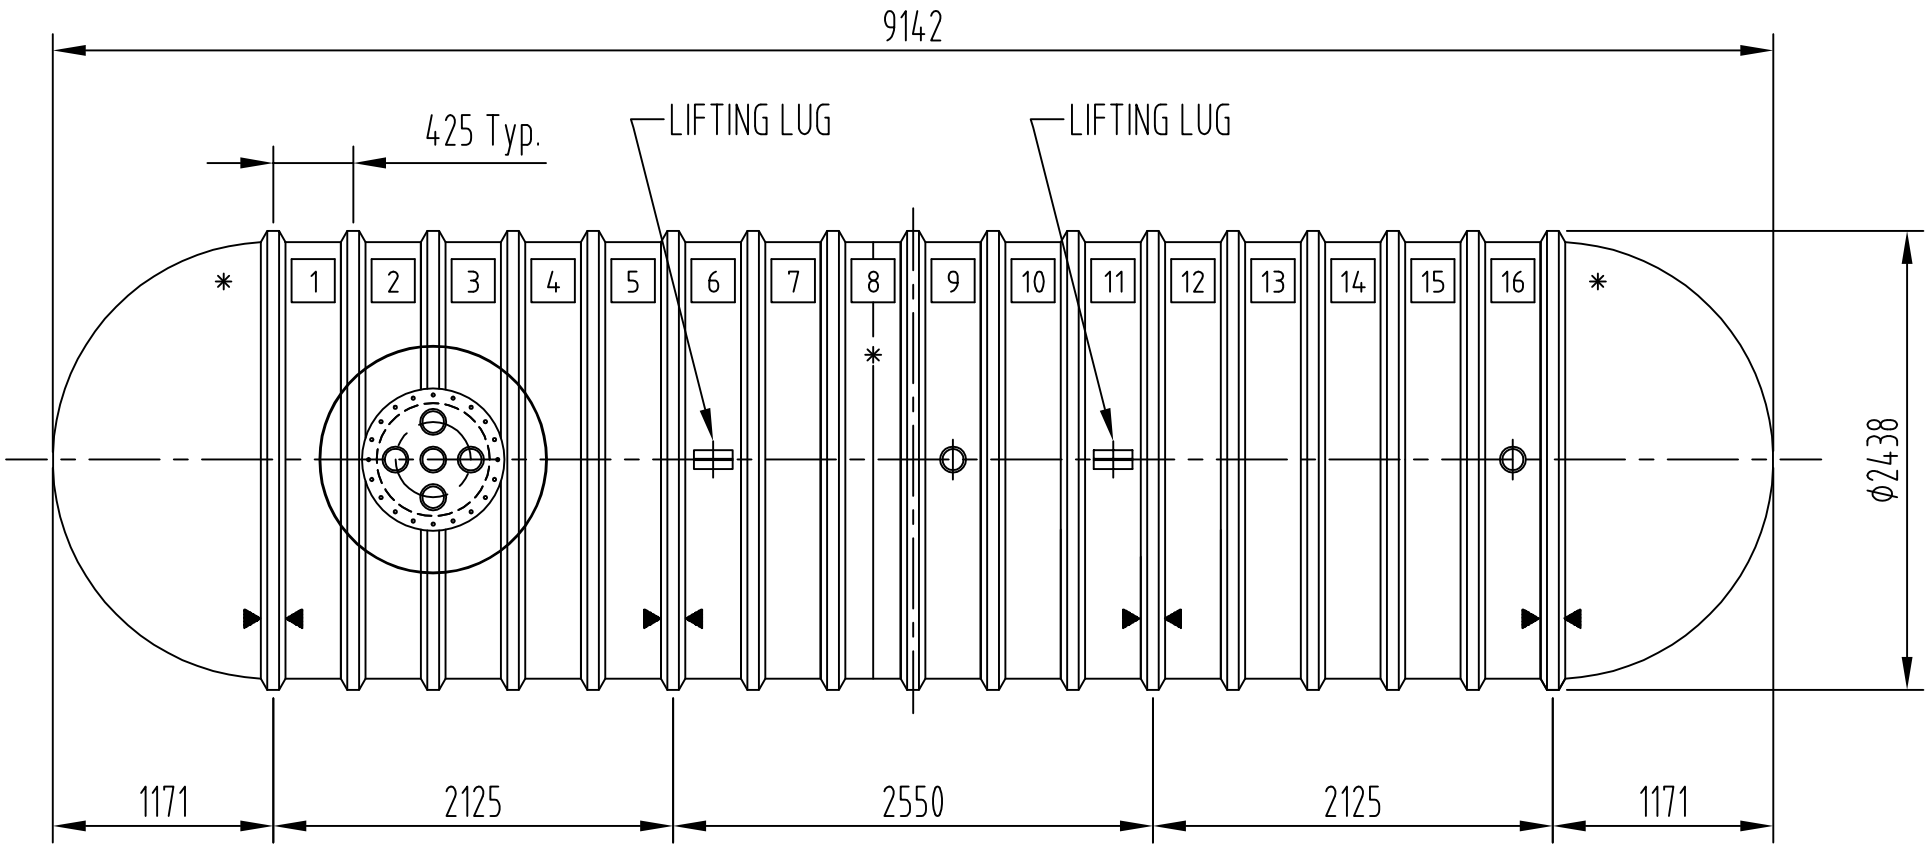


FITTING SCHEDULE

for TANK SOLUTIONS - DARRA PROJECT

| FLAT No. | SIZE | ITEM | DESCRIPTION | Notes | No | Revision Details | By | Date |
|---|---|---|---|---|---|---|---|---|
| 16 | 100NB | SOCKET | 100NB BSP SOCKET | – Tie-Down Straps to suit this tank are part no. | | | | |
| 9 | 100NB | SOCKET | 100NB BSP SOCKET | – Deadmen to suit this tank are part no. | | | | |
| 2-3 | 600NB | MANHOLE | MANHOLE c/w COVER & 5 x 100NB SOCKETS, RISER & LID | – UNO, all sockets are BSP and are c/w striker plates under. | A | Original Issue | – | – |

DRAWN: V.B.B.

DATE: 23-07-01

App. Weight: 1,080 kg

App. Capacity: 35,108 L

| Construction | Type | Compartment Configuration |
|---|---|---|
| SINGLE WALL | TYPE 35 | SINGLE |

DRAWING NUMBER: FP 035000-000

REVISION: A

The contractor shall provide Fibreglass Reinforced Plastic (FRP) underground storage tanks as illustrated. Sizes & fittings shall be as noted. The tanks shall be "Century-Cast" tanks as manufactured by Fibretank Systems Tanks shall be tested & installed as per current specifications and instructions.

All dimensions in millimetres. All dimensions are nominal unless a manufacturing tolerance has been specified.

THIS DRAWING & THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF FIBRE TANK SYSTEMS AND STRICTLY CONFIDENTIAL & MUST NOT BE USED OR DISCLOSED WITHOUT WRITTEN CONSENT OF FIBRETANK SYSTEMS PTY LIMITED

FIBRETANK SYSTEMS Pty Limited
PO BOX 102
CARRINGTON., NSW 2294
Ph:(02)4961-2745 Fax:(02)4962-2812