

Technical Data Sheet

F 980 REV B

DOUBLE WALL FIBREGLASS STORAGE TANKS

FTS is the market leader in the manufacture of Double Wall Fibreglass Storage Tanks. FTS Double Wall Fibreglass Tanks offer a full 360-degree secondary containment with a variety of monitoring devices, which can be installed in the interstitial space between the two walls. Due to FTS's unique integral rib design, Double Wall Fibreglass Tanks are the strongest, most robust underground tanks available. They are rust-proof, maintenance free and formulated to be compatible with all petroleum fuel products, alcohols and alcohol-gasoline mixtures. By choosing a FTS Double Wall Fibreglass Storage Tank, you can be assured of maximum protection in the unlikely event of a leak in the primary wall therefore preventing ground water contamination. Capacities range from 2,000 litres to 110,000 litres.

Double Wall Multi-Compartment tanks are also available in a wide variety of sizes and feature a choice of two or three completely separate compartments within one tank. This enables the storage of multiple products within the same tank.

DOUBLE WALL FIBREGLASS TANK FEATURES

Suitable for a wide range of liquids:

- Petroleum, Petrochemical and Chemical applications

Strength, Durability and Safety:

- All FTS Fibreglass Tanks are constructed of virgin resin and glass fibre reinforcement
- All FTS Tanks incorporate integral ribs for maximum strength
- All FTS Fibreglass Tanks undergo stringent testing during manufacture
- All FTS Tanks carry a 30 year warranty against structural failure, internal and external corrosion


A standard of consistent quality:

- Manufactured to meet or exceed industry and statutory requirements:
 - UL 1316
 - AS1692

COMPANY FEATURES

- Australian owned and operated
- Application and installation technical support
- Extensive manufacturing experience
- Full range of optional equipment and accessories to suit the complete project

DIMENSIONS AND CAPACITIES

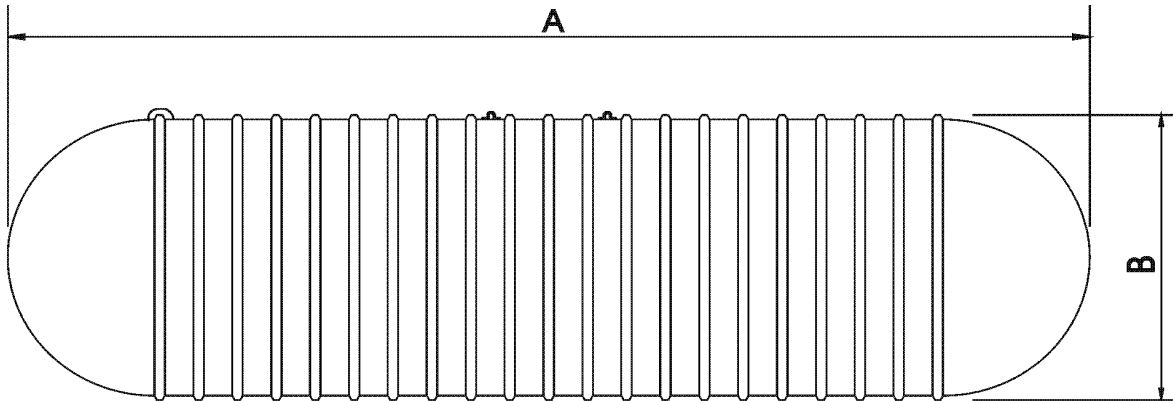

Type	Capacity Litres	Double Wall Actual Capacity Litres	Length Overall 'A' mm	External Diameter 'B' mm	Double Wall Shipping Weight Kg	No. of Straps
DWII T2	2,000	2,170	1,700	1470	350	2
DWII T5	5,000	5,260	3,300	1470	500	2
DWII T10	10,000	11,100	3,592	2438	1000	2
DWII T15	15,000	14,682	4,462	2438	1250	2
DWII T20	20,000	20,200	5,742	2438	1600	2
DWII T25	25,000	25,800	7,092	2438	1900	2
DWII T30	30,000	29,950	7,867	2438	2100	4
DWII T35	35,000	35,150	9,217	2438	2500	4
DWII T40	40,000	40,650	10,432	2438	2800	4
DWII T45	45,000	44,000	11,284	2438	3100	4
DWII T50	50,000	50,650	12,967	2438	3300	6
DWII T55	55,000	55,450	13,817	2438	3450	6
DWII T60	60,000	60,350	8,714	3275	3600	4
DWII T70	70,000	70,200	9,974	3275	4000	4
DWII T80	80,000	81,200	11,234	3275	4500	4
DWII T90	90,000	91,840	12,494	3275	5000	6
DWII T110	110,000	112,341	15,179	3275	6500	7

Weights, Capacities & Dimensions are nominal only

Custom manufactured tanks can be supplied upon request

Tanks are supplied as standard with:

- Access Manways, Riser and Standard Cover (for pressure systems only)
- Hold Down Straps and Lifting Lugs
- Fill, Dip, Vent, Suction, Spare Point, Dipstick and Striker Plates
- Non Slip Surface on Tank Top ▪ Tag Lines (Guide Rope)

Options and accessories available on request include:

- Water Tight Riser Cover ▪ Dry and Wet Monitoring System ▪ Driveway Covers
- Concrete Anchors and Hold Down Hardware for Bottom Anchoring
- Access Manways, Fabricated Steel Cover complete with 5 Sockets