

Technical Data Sheet

F 995 REV C

SINGLE WALL FIBREGLASS STORAGE TANKS

FTS is the market leader in the manufacture of Single Wall Fibreglass Storage Tanks. Due to FTS's unique integral rib design, Single Wall Fibreglass Tanks are the strongest, most robust underground tanks available. FTS Fibreglass Tanks are rust-proof, maintenance free and formulated to be compatible with all petroleum fuel products, alcohols and alcohol-gasoline mixtures. By choosing a FTS Fibreglass Tank, you are helping to protect the environment by preventing ground water contamination caused by fuels leaking from underground storage tanks. Capacities range from 2,000 litres to 110,000 litres.

Single Wall Multi-Compartment tanks are also available in a wide variety of sizes and feature a choice of two or three completely separate compartments within one tank. This enables the storage of multiple products within the same tank.

SINGLE WALL FIBREGLASS TANK FEATURES

Suitable for a wide range of liquids:

- Petroleum, Petrochemical and Chemical applications

Strength, Durability and Safety:

- All FTS Fibreglass Tanks are constructed of virgin resin and glass fibre reinforcement
- All FTS Tanks incorporate integral ribs for maximum strength
- All FTS Fibreglass Tanks undergo stringent testing during manufacture
- All FTS Tanks carry a 30 year warranty against structural failure, internal and external corrosion


A standard of consistent quality:

- Manufactured to meet or exceed industry and statutory requirements:
 - UL 1316
 - AS1692

COMPANY FEATURES

- Australian owned and operated
- Application and installation technical support
- Extensive manufacturing experience
- Full range of optional equipment and accessories to suit the complete project

DIMENSIONS AND CAPACITIES

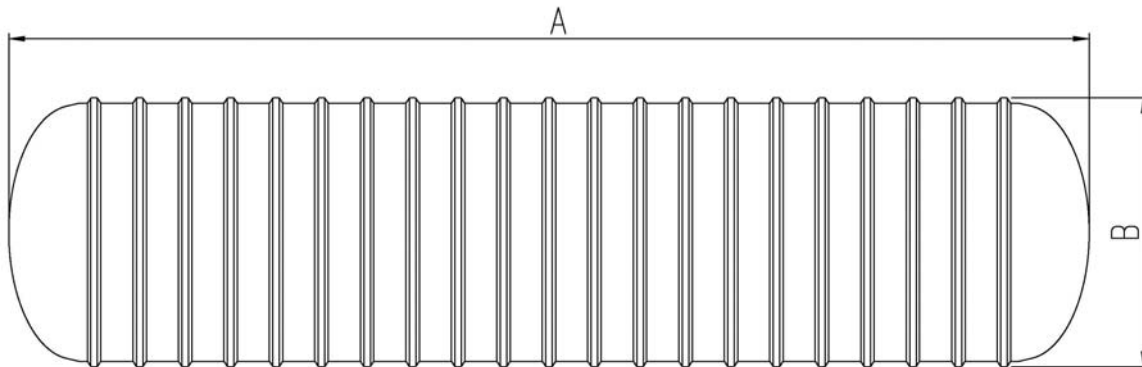

Type	Capacity Litres	Single Wall Actual Capacity Litres	Length Overall 'A' mm	External Diameter 'B' mm	Single Wall Shipping Weight Kg	No. of Straps
SW T2	2,000	2,500	1,700	1470	150	2
SW T5	5,000	5,300	3,300	1470	300	2
SW T10	10,000	13,500	3,295	2600	900	2
SW T15	15,000	15,600	3,720	2600	1,000	2
SW T20	20,000	21,800	4,995	2600	1,300	2
SW T25	25,000	25,900	5,845	2600	1,500	2
SW T30	30,000	30,000	6,695	2600	1,700	4
SW T35	35,000	36,200	7,970	2600	1,900	4
SW T40	40,000	40,300	8,820	2600	2,100	4
SW T45	45,000	46,500	10,095	2600	2,400	4
SW T50	50,000	50,600	10,945	2600	2,600	6
SW T55	55,000	56,800	12,200	2600	2,900	6
SW T60	60,000	60,900	13,070	2600	3,100	6
SW T70	70,000	69,900	9,994	3275	2,200	4
SW T80	80,000	79,800	11,254	3275	2,600	4
SW T90	90,000	91,600	12,514	3275	2,900	6
SW T100	100,000	102,000	14,194	3275	3,100	6
SW T110	110,000	111,200	15,034	3275	3,300	7

Weights, Capacities & Dimensions are nominal only

Custom manufactured tanks can be supplied upon request

Tanks are supplied as standard with:

- Hold Down Straps and Lifting Lugs
- Fill, Dip, Vent, Suction, Spare Point and Dipstick
- Collar, Riser and Standard Cover (for pressure systems only)

Options and accessories available on request include:

- Water Tight Riser Cover ▪ Driveway Covers
- Concrete Anchors and Hold Down Hardware for bottom anchoring
- Manholes, Fabricated Steel Cover complete with 5 Sockets